





InFire Rated Universal Dielectric



Are you looking for a universal design suitable for all applications but also able to withstand direct flame for 3 hours and more? Here's what we've got for you!

Design:

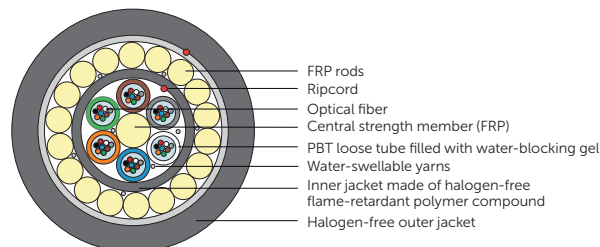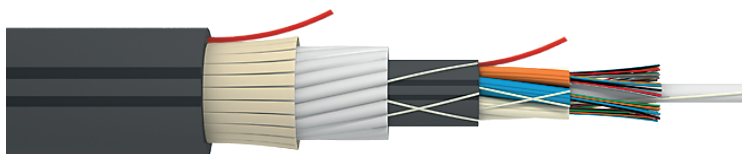

Technical parameters:

Designs with the following technical parameters can be produced:

Maximum rated design tension	from 1,574 lb
Crush	from 228 lb/in
Fiber count	up to 288 and more upon request

* Cables based on Customers' specific technical requirements can also be produced. Please, contact us for a cable designed to your exact specifications.


Key feature:



Remains functional under direct flame for at least 180 minutes and does not propagate a fire



See how fire rated cable works



One design — all applications:



InAir
aerial installation



InArmor
harsh environments



InDuct
ducts, trays, tunnels, etc.



InHome
indoor application



Fire rated • Low toxic • Low smoke • Zero halogen • Flame retardant
Recommended for installation on sites with increased security requirement



A armor of FRP rods provides good mechanical properties



Excellent rodent resistance



All-dielectric design.
Suitable for power lines and other utilities



UV resistance.
Outdoor installation without any problems

Contact:

Dan Berg
Vice President, Sales

(706) 388-1226
dan.berg@incabamerica.com