

Product Datasheet
fiber optic cable: InSky OPGW AP 24U (4x6) 13.4mm 66kA2·s 84kN

Order information

Design	Part number
InSky OPGW AP 24U (4x6) 13.4mm 66kA2·s 84kN	0313-67016

Features



Highly corrosion-resistant: ACS wires and aluminum pipe



Aluminum alloy wires provide conductivity for fault current




Optical ground wire shields high-voltage conductors from lightning strikes



Convenient splice preparation

Design

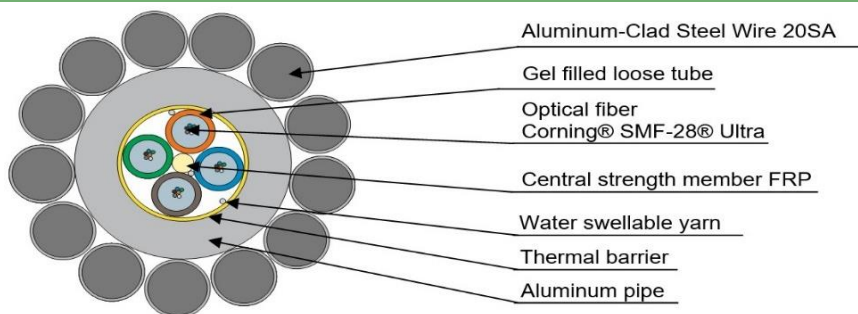

Design element	Material	Count	Diameter	
			Metric (mm)	Customary (inches)
Center member	AC-PLT	1	8.40	0.3307
1st stranded layer	20% ACS wire	13	2.50	0.0984

Technical Specifications

Mechanical	Metric	Customary
Cable diameter ± 0.2 mm (0.008 in)	13.4 mm	0.528 in
Cable unit weight	536 kg/km	0.360 lb/ft
Rated breaking strength (RBS)	84.0 kN	18 897 lb
Maximum rated design tension (MRDT) (61% RBS) with 0.2% fiber strain	51.2 kN	11 512 lb
Zero fiber strain margin (ZFSM) (46% RBS)	38.4 kN	8 634 lb
Cross-sectional area of ACS wire	63.8 mm ²	0.099 in ²
Total cross-sectional area of AY wire and Aluminum pipe	32.5 mm ²	0.050 in ²
Cable total cross-sectional area	96.3 mm ²	0.149 in ²
Modulus of Elasticity, initial	90.9 kN/mm ²	13 186 ksi
Modulus of Elasticity, final	122.8 kN/mm ²	17 814 ksi
Temperature coefficient of linear expansion	13.96 E ⁻⁶ /°C	7.75 E ⁻⁶ /°F
Southwire Sag10™ coefficient chart number	1-1457	-
Lay direction of outer layer	Left	-

Technical Specifications


Electrical	Metric	Customary
DC resistance at 20°C (68°F)	0.533 Ω /km	0.8575 Ω /mile
Short circuit capacity	66.5 kA ² ·s	-
Basis: Initial cable temp = 40°C (104°F), Final = 210°C (410°F), Duration = 0.5 s		
Short current circuit for 0.5 s	11.5 kA	-
Rac/Rdc ratio	1.012	-
AC resistance at 25°C (77°F)	0.5484 Ω /km	0.8826 Ω /mile
AC resistance at 50°C (122°F)	0.5958 Ω /km	0.9588 Ω /mile
AC resistance at 75°C (167°F)	0.6431 Ω /km	1.0350 Ω /mile
Geometric Mean Radius (GMR)	0.8241 mm	0.0027 ft
Inductive Reactance (Xa) @ 60 Hz	0.4459 Ω /km	0.7175 Ω /mile
Capacitive Reactance (X'a) @ 60 Hz	0.1822 M Ω -km	0.1132 M Ω -mile

Optical	
ITU-T fiber compliance	G.652D & G.657.A1
Fiber manufacturer	Corning SMF-28 ULTRA
Fiber count (Actual/Maximum)	24/24
Fibers per loose tube	6

Color identification of loose tubes and optical fibers is according to ANSI/TIA-598-D-2014

Loose tubes: 1-4

Optical fibers: 1-6



Other colors upon request

Fiber Dimensional Specifications:

Core-Clad Concentricity	0.5 μ m
Cladding Diameter	125 $\pm$ 0.7 μ m
Cladding Non-Circularity	0.7%
Coating Diameter	242 $\pm$ 5 μ m

Final Maximum Individual Attenuation Limits:

Wavelength	dB/km
1310 nm	0.34
1383 nm	0.34
1490 nm	0.23
1550 nm	0.20
1625 nm	0.22

Reel Packing and Handling	Metric	Customary
Maximum reel length	11 280 m	37 008 ft
Minimum bending radius, no load (tension < 5% RBS)	178 mm	7 in
Minimum bending radius, loaded (tension $\geq$ 5% RBS)	203 mm	8 in
Standard sheave diameter: first, last, angles $\geq$ 60°	559 mm	22 in
Standard sheave diameter: tangents and angles $\leq$ 60°	356 mm	14 in

Operating parameters	Metric	Customary
Operating temperature	-50°C ... +85°C	-58°F ... +185°F
Installation temperature	-30°C ... +50°C	-22°F ... +122°F
Transportation and storage temperature	-50°C ... +70°C	-58°F ... +158°F
Design Life	50 years	

Standards	International	USA
ACS wire	IEC 61232	ASTM B415
AY wire	IEC 60104	ASTM B398
OPGW cable	IEC 60794	IEEE 1138

Key Performance Testing		
Parameter	Nominal value	Evaluation criterion
Strain margin test (IEEE 1138-2009 p.6.4.1.3.)	51.2 kN	$\Delta\alpha^* < 0.20$ dB/test fiber km; - no damage
Crush (IEEE 1138-2009 p.6.4.2.2.)	1.0 kN/cm	$\Delta\alpha^* < 0.05$ dB/ fiber; - no damage
Twist (IEEE 1138-2009 p.6.4.2.4.)	2 cycles @ twist angle $\pm 90^\circ$ per 1 m	$\Delta\alpha^* < 0.10$ dB/test fiber km
Water ingress test (IEEE 1138-2009 p.6.4.3.5.)	1 m for 1 hours	No water through end of cable
Temperature cycling** (IEEE 1138-2009 p.6.4.3.7.)	-50°C to +85°C for 2 cycles over ≥ 16 hours	$\Delta\alpha^* < 0.20$ dB/test fiber km
Seepage of flooding compound (IEEE 1138-2009 p.6.4.3.6.)	65°C	No dripped compound

* - attenuation increase at standard wavelengths

** - other temperature range upon request

Reel Packing and Marking Notes

- Standard packing is non-returnable wooden reels
- Reel diameter $\geq 40 \times$ cable OD
- ≥ 2 m of inside end of cable is affixed to flange
- Cable ends are sealed with waterproof covers
- Label on the outer flange of the reel contains the following information:
cable type, customer's name and PO, reel number, production date, cable length, cable weight net/gross
- Flange marking includes: manufacturer's name and website, rotation direction, cable end indication, shipping and handling summary, labels "Fragile" and "Handle with care"
- A Cable Passport is attached to each reel and provides the following information:
cable type, technical standard number, cable length, fiber type, fiber coloring, fibers/tube, tube identification coloring, final attenuation for all fibers, refractive index of the fiber, fiber manufacturer and production date
- Each Cable Passport is affixed to the inner flange. Additional information can be included on the Cable Passport upon request

All values are nominal and are subject to normal manufacturing tolerances and to change without notice