

08.19.2021

Product Datasheet

fiber optic cable: InAir ADSS MT Aramid DJ-96U (4x24)-12kN

Order information

Design	Part number
InAir ADSS MT Aramid DJ-96U (4x24)-12kN	0325-72013-6

Other fiber counts available upon request

Typical application and features

- Aerial installation between poles and buildings
- Aerial installation on powerlines
- Aerial installation for communication lines
- Pulling into underground ducts and sewer pipes
- Installation along bridges, tunnels and other structures
- Installation into indoor/outdoor cable conduits and trays




All-dielectric design



UV-resistant

Design

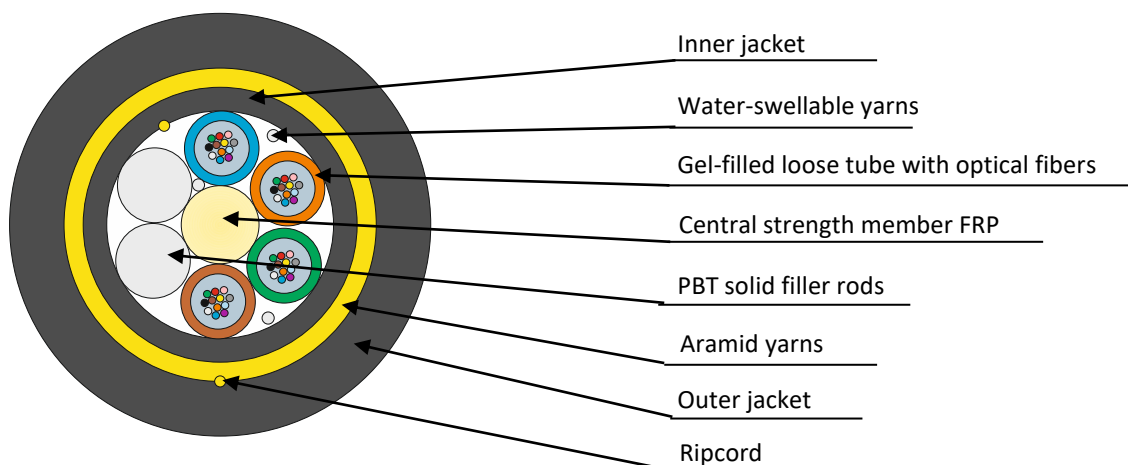

Cable consists of stranded core with central strength member (FRP), gel-filled loose tubes with optical fibers and PBT solid filler rods (natural color). Stranded core is fixed by water-swellable yarns. Inner jacket is made of LDPE. Aramid yarns are laid over inner jacket. Outer jacket is made of MDPE. One ripcord is laid under each jacket. Meets IEEE 1222-2011.

Optical fibers and loose tubes color identification:

1 Blue	2 Orange	3 Green	4 Brown	5 Slate	6 White	7 Red	8 Black	9 Yellow	10 Violet	11 Rose	12 Aqua
13 Blue	14 Orange	15 Green	16 Brown	17 Slate	18 White	19 Red	20 Natural	21 Yellow	22 Violet	23 Rose	24 Aqua

1 ring

Other colors upon request

Cable marking example

Marking is made on each 2 feet of cable

00001 FT = INCAB OPTICAL CABLE = PART NUMBER InAir ADSS MT Aramid DJ 96 U (4 x 24) 12KN 2021									
1	2	3	4	5	6	7	8	9	10
1	Length marking unit			6	Fiber type				
2	Manufacturer			7	Number of loose tubes				
3	Part number			8	Fibers per loose tube				
4	Cable trade name			9	Maximum rated design tension				
5	Fiber count			10	Year of production				

Additional information upon request. Marking can also be in meters

Design details

Fiber count		96
Number of loose tubes		4
Fibers per loose tube		24
Number of PBT fillers		2
Loose tube diameter	mm (in)	3.0 (0.118)
Inner jacket thickness	mm (in)	0.7 (0.028)
Outer jacket thickness	mm (in)	1.7 (0.067)
Cable diameter ± 0.2 (0.008)	mm (in)	14.4 (0.567)
Cable weight	kg/km (lb/ft)	153.7 (0.103)
Maximum rated design tension	kN (lb)	12.0 (2698)
Zero fiber strain margin	kN (lb)	10.0 (2248)
Stringing tension (STT)	kN (lb)	3.0 (675)
Rated breaking strength (RBS)	kN (lb)	23.39 (5259)
Modulus of elasticity, initial	kN/mm ² (ksi)	9.03 (1310)
Modulus of elasticity, final	kN/mm ² (ksi)	9.75 (1414)
Modulus of elasticity, creep	kN/mm ² (ksi)	6.32 (917)
Cable cross-sectional area	mm ² (in ²)	161.9 (0.251)
Coefficient of thermal expansion, 10 ⁻⁶	1/°C (1/°F)	6.42 (3.57)

Other design upon request

Optical fiber

Fiber type	«U»
Product name	Corning® SMF 28® ULTRA
ITU-T Recommendation	G.652D + G.657.A1
Dimensional Specifications	
Core-Clad Concentricity	0.5 µm
Cladding Diameter	125 ±0.7 µm
Cladding Non-Circularity	0.7 %
Coating Diameter	242 ±5 µm
Transmission Specifications	
Attenuation in the cable (dB/km)*:	
1310 nm wavelength (Typical** / Max.)	0.32 / 0.34
1550 nm wavelength (Typical** / Max.)	0.19 / 0.20

* Local attenuation discontinuities caused by cable winding on a reel are allowed.

** Typical attenuation is the real level of optical attenuation of at least 90% fibers after cabling

Additional information about optical fiber at www.incabamerica.com

Operating parameters		
Operation temperature range	-50°C...+70°C	-58°F...+158°F
	-60°C...+70°C*	-76°F...+158°F*
	* Available upon request	* Available upon request
Installation temperature range	-30°C...+50°C	-22°F...+122°F
Transportation and storage temperature range	-50°C...+70°C	-58°F...+158°F
Minimum bending diameter	20 x cable diameter	
Design life	25 years (per fiber supplier)	
Maximum space potential	12 kV	

Reel capacity		
Standard maximum reel length*	4,000 m	13,000 ft

* Longer length may be possible

Cable parameters		
Parameter	Nominal value	Evaluation criterion
Tensile strength (IEEE 1222-2011 p.6.5.1.2.)	12 kN	- $\Delta\alpha^* \leq 0.10$ dB - no damage
Crush (IEEE 1222-2011 p.6.5.2.2.)	0.22 kN/cm	
Twist (IEEE 1222-2011 p.6.5.2.4.)	- 10 cycles - torsion angle $\pm 360^\circ$ length 4 m	
Water ingress test (IEEE 1222-2011 p.6.5.3.3.)	Sample length: 3 m Testing time: 24 hours	No water at the cable end
Temperature cycling** (IEEE 1222-2011 p.6.5.3.5.)	- temperature range from -50°C to 70°C - 2 cycles - cycle period ≥ 16 hours	$\Delta\alpha \leq 0.10$ dB/km
Seepage of flooding compound (IEEE 1222-2011 p.6.5.2.7.)	at 65°C	No dripped compound

* - attenuation increasing at standard wavelengths

** - other temperature range upon request

Reel packing and marking

Cables are supplied on non-returnable wooden reels. Reel diameter is not less than 40 diameters of the cable. Not less than 2 m of inside end of the cable is fixed to the reel flange. The cable ends are sealed with waterproof covers.

The label on the outer reel flange contains our trademark, cable type, customer's name and PO, reel number, production date, cable length, cable weight net/gross.

The following information is printed on the reel flange: manufacturer's name and website, rotation direction, cable end indication, shipping and handling summary, labels "Fragile" and "Handle with care".

Our cable passport shows: cable type, technical standard number, cable length, fiber type, fiber coloring, fibers per tube, tube identification coloring, final attenuation for all fibers, refractive index of the fiber, fiber manufacturer and production date.

Cable passport is affixed to the inner flange in a plastic bag. Additional information can be included on the passport upon request.

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Incab America LLC can take no responsibility for actions taken based on the information contained in this document. Incab America reserves the right to make changes to this document without notice. All sales of product are subject to Incab America's terms and conditions of sale only, which can be found on the website www.incabamerica.com. This document is protected by copyright (c) of Incab America LLC. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Incab America will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.